



































































































































## Withdrawal Sleeves



Shaft Ø	Dimension						Designation adapter sleeve, complete	Mass kg	Lock Nut
	d <sub>1</sub>	d	G	G <sub>1</sub>	G <sub>2</sub>	L			
		mm							
280	300	Tr 330 X 5	30	G 1/4	192	200	<b>A0H3160</b>	19,0	HM 66 T
		Tr 330 X 5	34	G 1/4	228	236	<b>A0H3260</b>	23,5	HM 66 T
		Tr 310 X 5	24	G 1/8	184	202	<b>A0H24060</b>	14,0	HM 62 T
		Tr 320 X 5	24	G 1/4	224	242	<b>A0H24160</b>	18,5	HM 3164
300	320	Tr 345 X 5	27	G 1/4	149	157	<b>A0H3064</b>	14,5	HM 69 T
		Tr 350 X 5	31	G 1/4	209	217	<b>A0H3164</b>	22,5	HM 70 T
		Tr 350 X 5	36	G 1/4	246	254	<b>A0H3264</b>	27,5	HM 70 T
		Tr 330 X 5	24	G 1/8	184	202	<b>A0H24064</b>	15,0	HM 66 T
		Tr 340 X 5	24	G 1/4	242	260	<b>A0H24164</b>	20,5	HM 3168
320	340	Tr 365 X 5	28	G 1/4	162	171	<b>A0H3068</b>	17,5	HML 73 T
		Tr 370 X 5	33	G 1/4	225	234	<b>A0H3168</b>	26,5	HM 74 T
		Tr 370 X 5	38	G 1/4	264	273	<b>A0H3268</b>	32,0	HM 74 T
		Tr 360 X 5	26	G 1/4	206	225	<b>A0H24068</b>	18,0	HM 3072
		Tr 360 X 5	26	G 1/4	269	288	<b>A0H24168</b>	25,5	HM 3172
340	360	Tr 385 X 5	30	G 1/4	167	176	<b>A0H3072</b>	19,0	HML 77 T
		Tr 400 X 5	35	G 1/4	229	238	<b>A0H3172</b>	30,0	HM 3180


## Withdrawal Sleeves

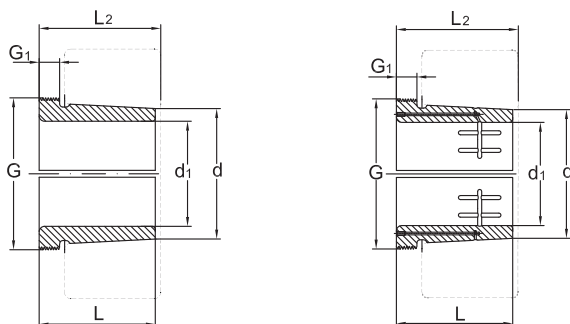

Shaft Ø	Dimension						Designation adapter sleeve, complete	Mass kg	Lock Nut
	d <sub>1</sub>	d	G	G <sub>1</sub>	G <sub>2</sub>	L			
mm									
<b>340</b>	360	Tr 400 X 5	40	G 1/4	274	283	<b>A0H3272</b>	33,0	HM 3180
		Tr 380 X 5	26	G 1/4	206	226	<b>A0H24072</b>	20,0	HM 3076
		Tr 380 X 5	26	G 1/4	269	289	<b>A0H24172</b>	26,0	HM 3176
<b>360</b>	380	Tr 410 X 5	31	G 1/4	170	180	<b>A0H3076</b>	23,5	HML 82 T
		Tr 420 X 5	36	G 1/4	232	242	<b>A0H3176</b>	38,0	HM 3184
		Tr 420 X 5	42	G 1/4	284	294	<b>A0H3276</b>	45,5	HM 3184
		Tr 400 X 5	28	G 1/4	208	228	<b>A0H24076</b>	23,5	HM 3080
		Tr 400 X 5	28	G 1/4	271	291	<b>A0H24176</b>	31,0	HM 3180
<b>380</b>	400	Tr 430 X 5	33	G 1/4	183	193	<b>A0H3080</b>	27,0	HML 86 T
		Tr 440 X 5	38	G 1/4	240	250	<b>A0H3180</b>	39,5	HM 3188
		Tr 440 X 5	44	G 1/4	302	312	<b>A0H3280</b>	51,5	HM 3188
		Tr 420 X 5	28	G 1/4	228	248	<b>A0H24080</b>	27,0	HM 3084
		Tr 420 X 5	28	G 1/4	278	298	<b>A0H24180</b>	35,0	HM 3184
<b>400</b>	420	Tr 450 X 5	34	G 1/4	186	196	<b>A0H3084</b>	29,0	HML 90 T
		Tr 460 X 5	40	G 1/4	266	276	<b>A0H3184</b>	46,0	HM 3192
		Tr 440 X 5	30	G 1/4	230	252	<b>A0H24084</b>	29,0	HM 3088



### Withdrawal Sleeves



Shaft Ø	Dimension						Designation adapter sleeve, complete	Mass kg	Lock Nut
	d <sub>1</sub>	d	G	G <sub>1</sub>	G <sub>2</sub>	L			
	mm								
<b>400</b>	420	Tr 440 X 5	30	G 1/4	310	332	<b>A0H24184</b>	39,0	HM 3188
<b>420</b>	440	Tr 460 X 5	30	G 1/4	242	264	<b>A0H24088</b>	32,0	HML 92 T
		Tr 460 X 5	30	G 1/4	310	332	<b>A0H24188</b>	45,5	HM 3192
<b>440</b>	460	Tr 480 X 5	32	G 1/4	332	355	<b>A0H24192</b>	50,0	HM 3196
<b>460</b>	480	Tr 500 X 5	32	G 1/4	340	363	<b>A0H24196</b>	51,5	HM 31/500
<b>480</b>	500	Tr 530 X 6	35	G 1/4	360	383	<b>A0H241/500</b>	57,0	HM 31/530
<b>500</b>	530	Tr 550 X 6	35	G 1/4	370	394	<b>A0H241/530</b>	86,0	HM 110 T
<b>530</b>	560	Tr 580 X 6	38	G 1/4	393	417	<b>A0H241/560</b>	97,0	HM 116 T
<b>560</b>	600	Tr 630 X 6	38	G 1/4	413	439	<b>A0H241/600</b>	120	HM 126 T
<b>600</b>	630	Tr 650 X 6	40	G 1/4	440	466	<b>A0H241/630</b>	130	HM 130 T

# URB

